


Totally Enclosed Premier Liftbag.



The Premier Professional Totally Enclosed liftbags range from the 1,000 Kg (model T1) to the 50,000 Kg (model T50) with a safe working load of 6:1. Each bag has heavy duty webbing straps, anchor points, shackles, air inlet/outlet valves and air relief valves. All liftbags are supplied ready for use with test certificates and logbook.

Technical Specifications

| Model | Lift Capacity | Overall Length | Overall Dia | Overall Height | Shackle Pick Up Points | ¾ Inch Inlet Valve | Approx. Folded Dimensions m./dia x m./l | Net Weight |
|-------|---------------|----------------|-------------|----------------|------------------------|--------------------|---|------------|
| T1 | 1000 Kg | 1.85 M | 1.00 M | 1.15 M | 2 | 2 | 0.35 x 1.18 | 23.0 Kg |
| T2 | 2000 Kg | 2.30 M | 1.23 M | 1.38 M | 3 | 2 | 0.40 x 1.04 | 40.5 Kg |
| T3 | 3000 Kg | 2.65 M | 1.43 M | 1.58 M | 3 | 2 | 0.45 x 1.15 | 49.0 Kg |
| T5 | 5000 Kg | 3.76 M | 1.43 M | 1.58 M | 5 | 2 | 0.50 x 1.30 | 77.0 Kg |
| T6 | 6000 Kg | 4.42 M | 1.43 M | 1.58 M | 5 | 2 | 0.50 x 1.32 | 85.0 Kg |
| T10 | 10000 Kg | 3.93 M | 1.91 M | 2.08 M | 6 | 2 | 0.60 x 1.30 | 126.0 Kg |
| T15 | 15000 Kg | 4.65 M | 2.42 M | 2.59 M | 7 | 2 | 0.65 x 1.30 | 146.0 Kg |
| T20 | 20000 Kg | 5.65 M | 2.42 M | 2.59 M | 7 | 2 | 0.75 x 1.30 | 166.0 Kg |
| T25 | 25000 Kg | 5.65 M | 2.55 M | 2.72 M | 7 | 2 | 0.70 x 1.60 | 228.0 Kg |
| T30 | 30000 Kg | 6.14 M | 2.70 M | 2.90 M | 6 | 2 | 0.80 x 1.60 | 290.0 Kg |
| T35 | 35000 Kg | 6.20 M | 2.90 M | 3.10 M | 6 | 2 | 0.85 x 1.60 | 320.0 Kg |
| T50 | 50000 Kg | 8.00 M | 2.90 M | 3.10 M | 9 | 2 | 0.90 x 1.60 | 350.0 Kg |

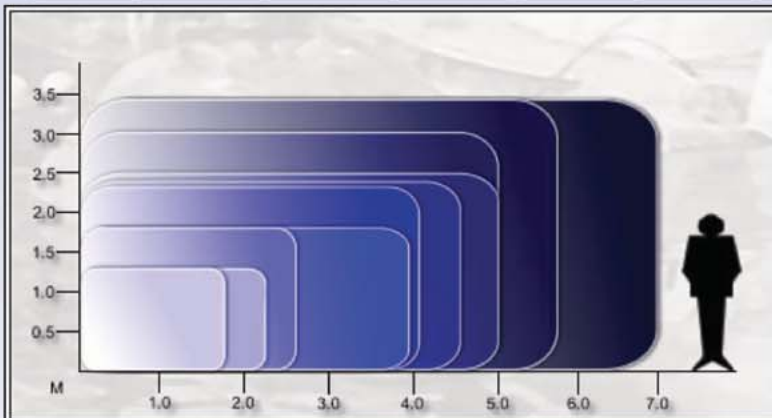

Advantages

Optional lifting beam with multiple pick up points.
 Fabricated from high tenacity polyester cloth coated with P.V.C.
 Durable, versatile and easy to use.
 Folded compactly for easy efficient storage.
 Radio Frequency (RF) welded seams for strength and integrity.
 Safe working load ratio of 6:1.
 Complete with test certifications and logs, these products are ready for use when leaving our manufacturing facility.
 Suitable for shallow water usage.
 Suitable for long term use.

Applications

- Military Equipment.
- Bridge supports.
- Pontoons.
- Extra buoyancy for pipe and cable float-out operations.



All of JW Automarine's products are manufactured in accordance with **EN ISO 9001:2000** and exceed **IMCA D016 REV 3:2007** requirements of 5:1 SWL
Quality Certifications
 EN ISO 9001:2000 Certificate Number GB93/1901